


SHEFFIELD CITY HALL



IRWIN MITCHELL OVAL HALL

Seating Plan

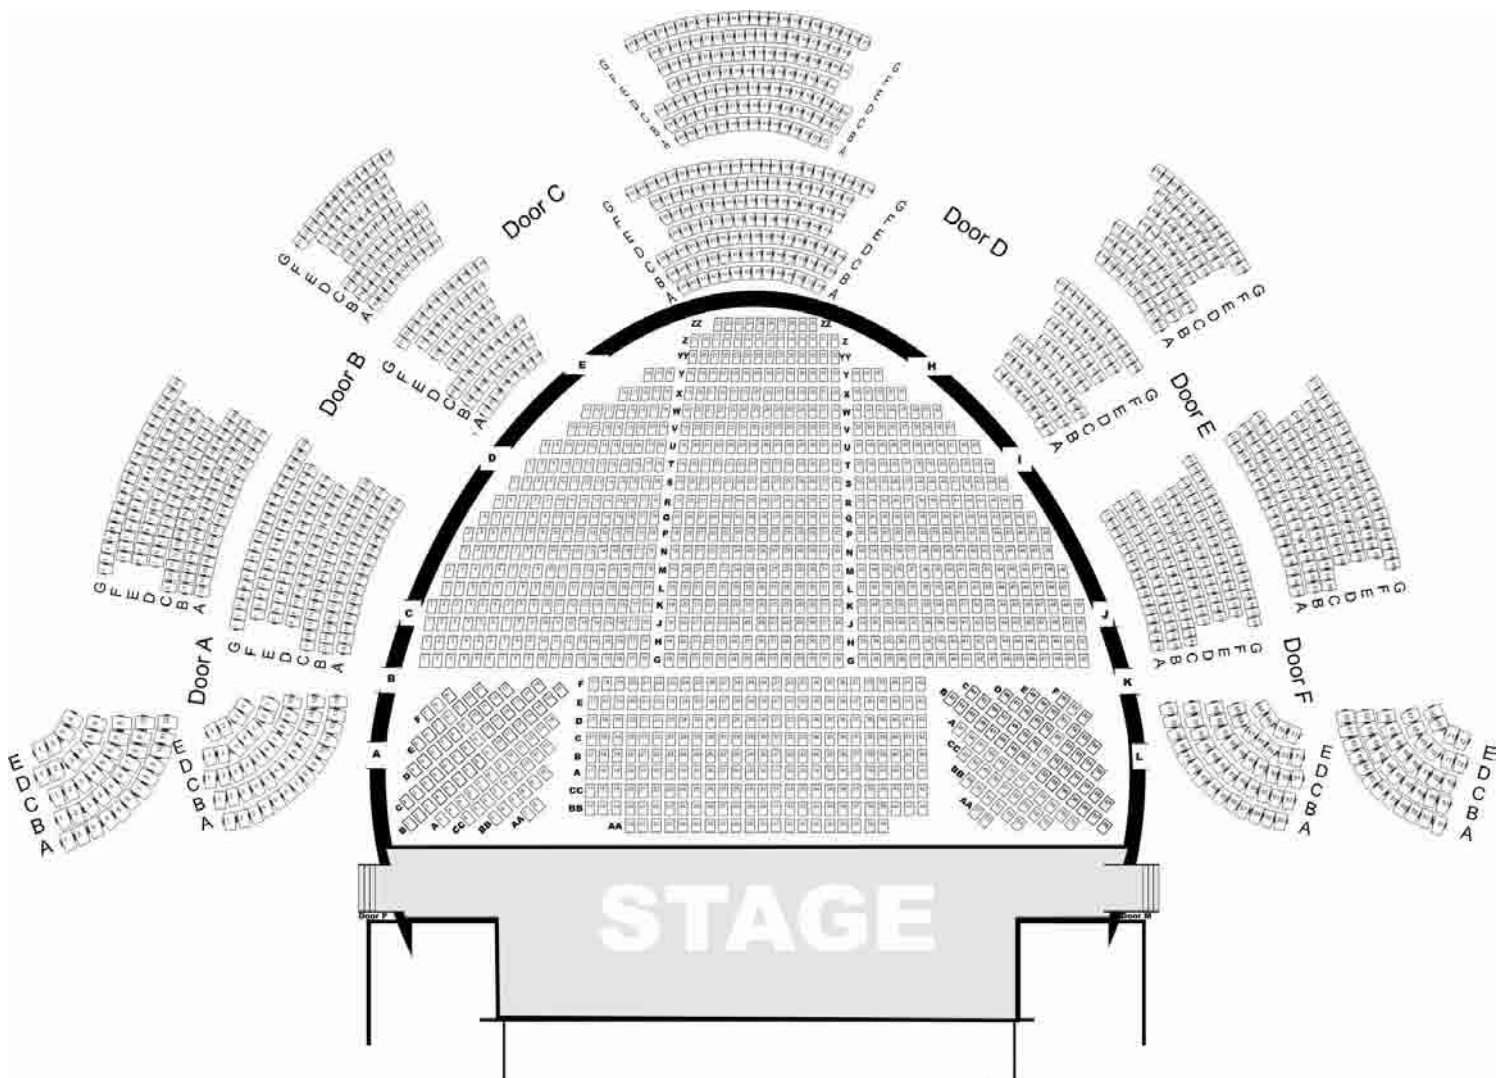

SHEFFIELD CITY HALL



ROOM CAPACITIES AND FACILITIES

Room / Suite	Theatre	Boardroom	Area sq m	Internet access	Dining Seated	Wheelchair Access	Natural Daylight
Irwin Mitchell Oval Hall	2271	n/a	n/a	Y	n/a	Y	Y
Memorial Hall	430	50	245	Y	150	Y	Y
Ballroom	450	50	475	Y	300	Y	N
North Hall	150	30	150	Y	70	Y	N
South Hall	150	30	175	Y	70	Y	N
Harris Suite	50	20	54	Y	30	Y	Y
Barbirolli Suite	50	20	54	Y	30	Y	Y
Balcony East	10	n/a	19	Y	n/a	Y	Y

Irwin Mitchell Oval Hall Technical Specifications

Capacity – Total 2271

(Stalls – 1118, Circle – 575, Balcony – 578, Stalls rows AA to F – 386)

Capacity Deductions

Stage extension – 52

Mixer – between 28 - 56 depending on area required

Stage

19m x 8.5m (62'6" x 27'6")

Height of stage 1020mm (40")

Stage extension 15.5m x 2.15m (50'6" x 7'0")

PA wings 4m x 2.8m (13'00" x 9'00")

Open stage / No fire curtain

Stage load 5kn/m² (104lb/ft²)

Blacks and pros arch if required

Lighting Grid

12.2m (39'00") clearance to grid

The maximum total suspended load must not exceed 10.000kg (10 tonnes)

The loads must be applied to the frame to give a reasonably symmetrical load pattern over the plan area of the frame

P.A. Hoists

Safe working load of P.A. hoists is 1.000kg (1 tonne) per hoist

Power

For lighting tails 400 amps 3 phase, neutral + earth maximum

For sound tails 200 amps 3 phase, neutral + earth maximum

For motors 32 amps 3 phase, neutral + earth ceeform

For sound 16 amps 1 phase, neutral + earth ceeform

Muticore trap run

50m minimum for both sound and lights

20m direct distance from stage to mixer, lighting desk position

Smoke, pyro effects

Full list of those intended for use to be submitted at least 21 days prior to event for licensing approval

Stage lighting

Celco Pathfinder Board, Celco Dimmers (7)

Overhead 22 x 1 kw par cans (floods)

Front of house 28 x 1kw rank strand fresnells

4 x 1kw rank strand profiles

6 x 1kw source four

2 x 1200w follow spots

House lights

Full or part blackout controlled from side stage

House P.A.

Speech and background music only

Dressing rooms

Main dressing room can be either one large room or three smaller, two with shower and washing, toilet facilities, localised air conditioning in each dressing room.

Six other dressing rooms with washing, toilet facilities, three of which have showers.

Catering

Catering / crew room with kitchen facilities; Electric only, no portable gas appliances allowed in venue

Production office

6 x telephone points

6 x data points

8 x 240v socket outlets

Landlines

Sockets (3 x 16amp ceeform) to connect to bus landlines are available to the right of the stage door, behind metal grille – power on/off inside

Access

Direct from Holly Street, outer load in door 1020mm x 2460mm (40" x 97")